



Uruchomienie klienta URC

Podczas kolejnych uruchomień klienta URC nie jest już konieczne tworzenie pliku keystore oraz pobieranie konfiguracji. Aby zalogować się do klienta należy w oknie logowania wskazać utworzony wcześniej plik keystore (może być to również plik przeniesiony z innego komputera), podać hasło i kliknąć przycisk `Finish`.

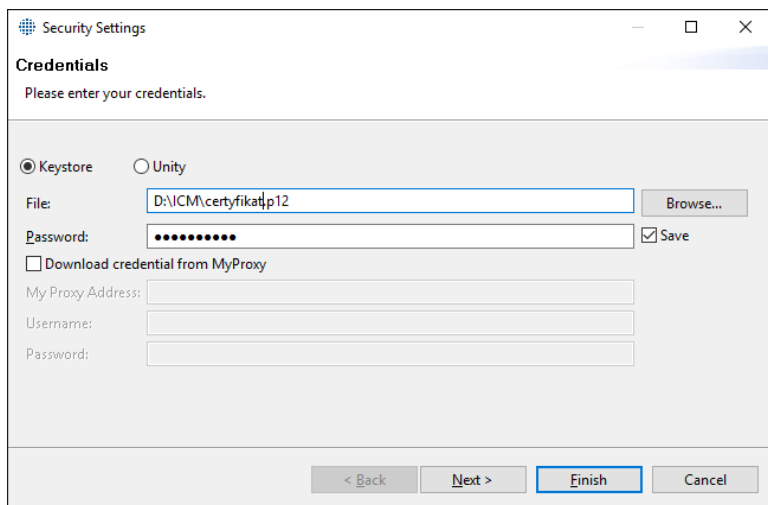


The screenshot shows the 'Security Settings' dialog box with the 'Credentials' tab selected. The title bar reads 'Security Settings'. Below the title bar, the text 'Credentials' is displayed, followed by the instruction 'Please enter your credentials.' There are two radio buttons: 'Keystore' (selected) and 'Unity'. Below this, there is a 'File:' text box containing 'D:\ICM\certyfikat.p12' and a 'Browse...' button. A 'Password:' text box contains a masked password '●●●●●●●●' and a checked 'Save' checkbox. There is an unchecked checkbox labeled 'Download credential from MyProxy'. Below this are three text boxes: 'My Proxy Address:', 'Username:', and 'Password:'. At the bottom, there are four buttons: '< Back', 'Next >', 'Finish' (highlighted with a blue border), and 'Cancel'.

W oknie, które się pojawi należy ponownie wskazać ten sam plik, wpisać hasło i kliknąć przycisk `Finish`.

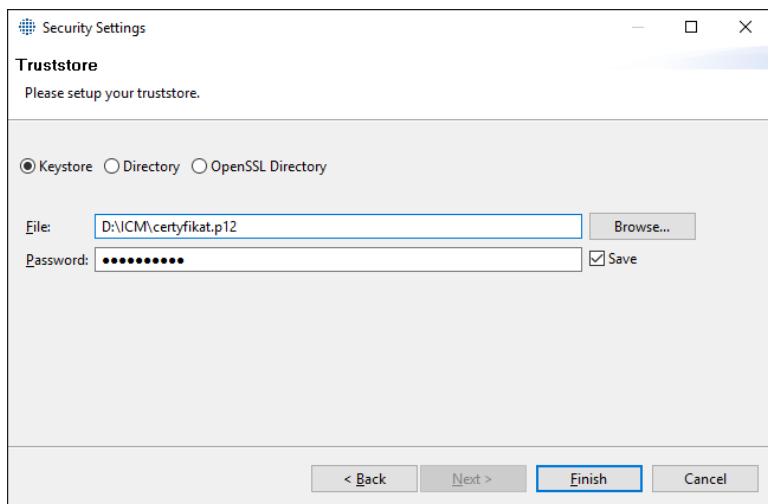

The screenshot shows the 'Security Settings' dialog box with the 'Truststore' tab selected. The title bar reads 'Security Settings'. Below the title bar, the text 'Truststore' is displayed, followed by the instruction 'Please setup your truststore.' There are three radio buttons: 'Keystore' (selected), 'Directory', and 'OpenSSL Directory'. Below this, there is a 'File:' text box containing 'D:\ICM\certyfikat.p12' and a 'Browse...' button. A 'Password:' text box contains a masked password '●●●●●●●●' and a checked 'Save' checkbox. At the bottom, there are four buttons: '< Back', 'Next >', 'Finish' (highlighted with a blue border), and 'Cancel'.

Klient URC będzie od razu gotowy do pracy.

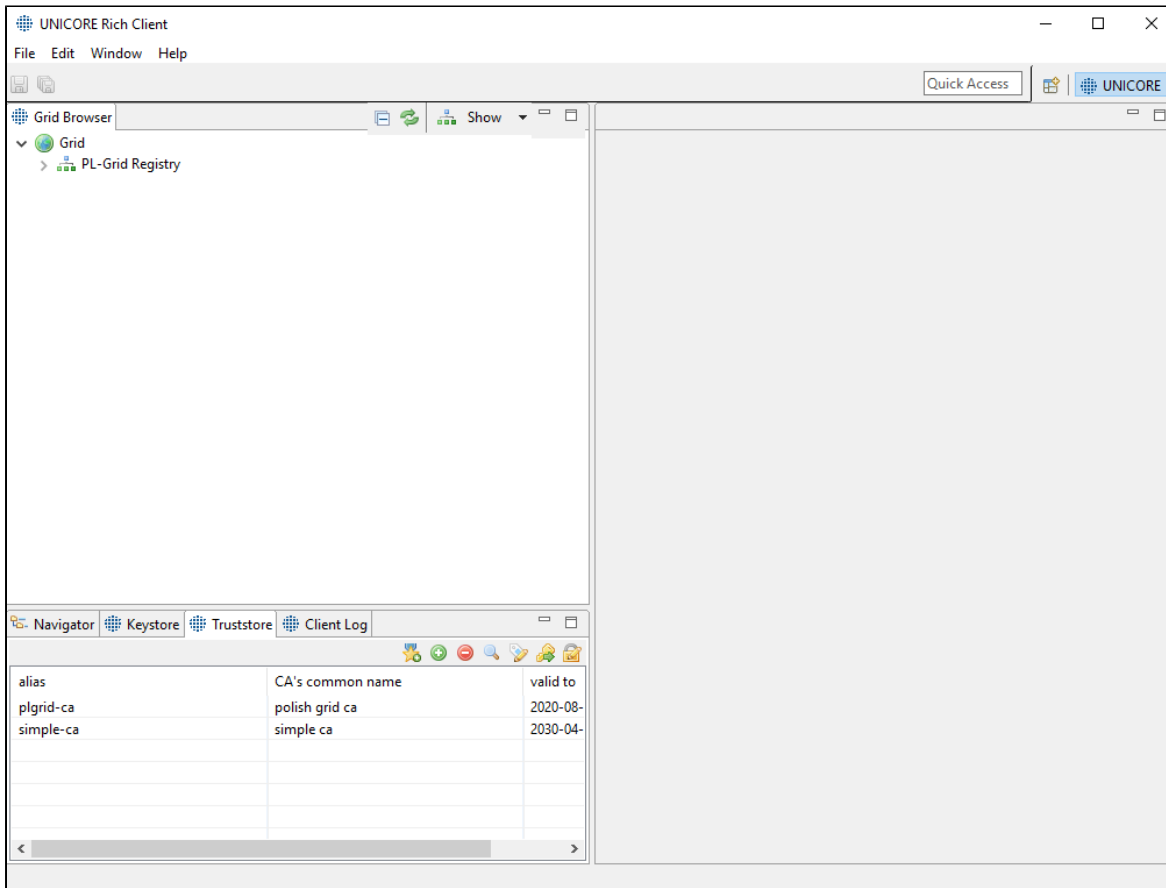

Co dalej?

[Elementy klienta URC](#)